

NETYS RT

Single-phase UPS rack/tower
from 1 to 10 kVA



Function

NETYS RT is the fourth generation of single-phase rack-tower UPS, ensuring the protection and availability of IT infrastructure that meets the demands of both power reliability and installation flexibility.

Advantages

Best-in-class design

- True online double conversion technology with sinusoidal waveform; completely filters out all disturbances from / to the mains power supply and ensures maximum protection of the utility.
- Wide tolerance of the input voltage reduces switchovers to battery mode, prolonging battery life.
- Potential for N+1 parallel and redundant configuration to maximise the availability of critical utilities (up to 30 kVA).
- Li-ion battery option for greater compactness and reduced maintenance.
- Robust coated versions for highly demanding applications.
- Performance tested and verified by third party independent laboratory.
- Wide operating ambient temperature up to 45°C.

Up to 5-year warranty

- Lead-acid battery: 2-year UPS warranty, with the option of a 3-year extension.
- Lithium-ion battery: 3-year UPS warranty with the option of a 2-year extension. The battery is also covered by the warranty if the UPS is connected to Socomec's cloud.
- In the event of failure, a replacement product will be sent to site within 48 hours (Europe). You will have 1 month to return the faulty product to Socomec.

Ease of use

- Multi-language LCD display.
- Large LED status bar.
- Load segmentation function to prioritise loads and manage critical situations.

- Wide range of communication protocols for integration into LAN networks or Building Management Systems.

Optimum battery management

- Lead-acid and Li-ion battery technology management.
- Hot-swap modular battery extension (EBM) to meet all back-up time requirements - even after installation.
- Battery ageing detection function.
- Fast recharge – even for very long back-up time.

IoT and cybersecurity

- Potential to add Net Vision network card for a direct and secure connection between the UPS and the Ethernet network, and for access to a full panel of digital services such as the SoLive remote monitoring app.
- Conformance to the cybersecurity guidelines of ISO/IEC 62443-4-2 standard.
- Cybersecurity test certified by a third party company.

Simple installation within any operating environment

- Quick and simple installation: no configuration necessary on first start up, avoiding risk of human error.
- Full set of accessories for easy and safe installation.
- Easy switch from rack to tower mode will suit most environments - even with limited space and specific needs.
- Compact footprint in tower mode.
- High density module saving valuable cabinet rack space.

The solution for

- > Data centre
- > Healthcare Facilities
- > Infrastructure & Transport
- > Industry
- > Buildings

Strong points

- > Best-in-class design
- > Optimum battery management
- > Up to 5-year warranty
- > Simple installation within any operating environment
- > Ease of use
- > IoT and cybersecurity

Compliance with standards

- > IEC 62040-1
- > IEC 62040-2
- > IEC 62040-3 (efficiency tested)
- > AS 62040.1.1
- > AS 62040.1.2
- > AS 62040.2
- > RCM (E2376)

Certifications and attestations



General characteristics

- Rack/Tower convertible.
- Embedded dry-contact interface.
- Input/Output cables (1000-3000 VA).
- Rail kit and rack ears.
- USB cable.
- Tower stands.
- Cable lockers.
- Connection for battery extension modules.
- Port for parallel operation (5000 - 10000 VA).
- Internal temperature sensor.
- Power off the UPS remotely.
- Cold start.
- Auto and Manual battery test.

Electrical options

- UPS models with tropicalised (Conformal Coating) boards.
- Hot-swap battery extension modules.
- External Manual By-pass.
- Longer battery cable, 1 side free for special cabinets.

Standard communication features

- 1 slot for communication options.
- USB port for UPS management.
- MODBUS RTU (RS232).
- RS485 for Li-ion Offer (BMS).
- LOCAL VIEW software for local UPS monitoring and shutdown for Windows, Linux and MAC OSX.

Communication options

- Dry-contact card.
- NET VISION Card or NET VISION Box: professional WEB/SNMP, ethernet interface for UPS monitoring and remote automatic shutdown (MODBUS TCP).
- Environmental Monitoring Device (EMD).
- REMOTE VIEW PRO supervision software.

Remote monitoring and cloud services

- SoLive UPS: free mobile app enabling UPS systems to be monitored from a smartphone, anywhere, anytime.

Technical data

| NETYS RT | | | | | | | | | | |
|----------------------------------|---|-----------|---|-----------|---|-----------|-----------|-----------|---|-----------|
| Model | NRT4-U010 | NRT4-U015 | NRT4-U020 | NRT4-U030 | NRT4-050K | NRT4-060K | NRT4-080K | NRT4-100K | NRT4-108K | NRT4-110K |
| Sn | 1000 VA | 1500 VA | 2000 VA | 3000 VA | 5000 VA | 6000 VA | 8500 VA | 10000 VA | 8500 VA | 10000 VA |
| Pn | 1000 W | 1500 W | 2000 W | 3000 W | 5000 W | 6000 W | 8500 W | 10000 W | 8500 W | 10000 W |
| Architecture | Online duple conversion VFI with input PFC and automatic bypass | | | | | | | | | |
| Parallel redundant function | - | | | | Up to 3 | | | | | |
| Input/output | 1/1 | | | | | | | | 1/1 or 3/1 | |
| INPUT | | | | | | | | | | |
| Voltage | 230 V 1/1 110 V ÷ 300 V ; (160 V÷ 300 V @100% load) | | | | 230 V 1/1 110V ÷ 276V; (160 V ÷ 276 V @100% load) | | | | 230 V 1/1 or 400 V 3/1 110 V ÷ 276 V; (160 V÷ 276 V @100% load) | |
| Frequency | 40/70 Hz (50/60 Hz +/-10% auto-selectable) | | | | | | | | | |
| Power Factor | >0.99 | | | | | | | | | |
| Surge Protection | 296J | | | | | | | | 405J L1-L2-L3 445J L1/L2/L3 - PE | |
| Input socket | 10 A IEC 320-C14 | | 16 A IEC 320-C20 | | Terminals block | | | | | |
| OUTPUT | | | | | | | | | | |
| Voltage | 230 V (1ph) selectable 200/208/220/230/240 V ±1% (derating 10% @208 V / 20% @200 V) | | | | | | | | | |
| Efficiency | Up to 94.6% online mode | | | | Up to 95.6% online mode | | | | | |
| Overload capability | Up to 105% continuously; 125% x 5 min; 150% x 30 sec; > 150% 500 ms | | | | Up to 105% continuously; 125% x 10 min; 150% x 30 sec; >150% 500 ms | | | | | |
| Output connections | 1 main group (4x IEC C13) 1 programmable group (4x IEC C13) | | 1 main group (1x IEC C19 + 4x IEC C13) 1 programmable group (4x IEC C13) | | Terminals block | | | | | |
| BATTERY | | | | | | | | | | |
| Standard autonomy ⁽¹⁾ | 15 | 9 | 16 | 10 | 13 | 10 | 14 | 11 | 14 | 11 |
| Voltage | 36 VDC | | 72 VDC | | 192 VDC | | 240 VDC | | | |
| Type | Sealed lead-acid maintenance free - expected life 3 / 5 years | | | | | | | | | |
| COMMUNICATION | | | | | | | | | | |
| Mimic panel | LCD with menu available in 11 languages | | | | | | | | | |
| RS232 MODBUS protocol | • | • | • | • | • | • | • | • | • | • |
| USB port | • | • | • | • | • | • | • | • | • | • |
| WEB/SNMP | Option | Option | Option | Option | Option | Option | Option | Option | Option | Option |
| COMM slot | • | • | • | • | • | • | • | • | • | • |
| Dry contacts | • | • | • | • | • | • | • | • | • | • |
| EPO input | • | • | • | • | • | • | • | • | • | • |
| Parallel port | - | - | - | - | • | • | • | • | • | • |
| STANDARDS | | | | | | | | | | |
| Safety | IEC/EN 62040-1, AS 62040.1.1, AS 62040.1.2 | | | | | | | | | |
| EMC | IEC/EN 62040-2, AS 62040.2 | | | | | | | | | |
| Performance | IEC/EN 62040-3 (efficiency tested by an external independent body) | | | | | | | | | |
| Product declaration | CE, RCM, UKCA, CMIM | | | | | | | | | |
| ENVIRONMENT | | | | | | | | | | |
| Operating ambient temperature | From 0° C to +45° C ⁽²⁾ | | | | From 0° C to +45° C | | | | | |
| Relative Humidity | 0 to 95% (non-condensing) | | | | | | | | | |
| Noise level (ISO 3746) | <45 dB | | <50 dB | | | | <55 dB | | | |

Technical data

UPS CABINET

| | | | | | | | | | | |
|-----------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| UPS size std mm (W x D x H) | 438 x 445 x 85.5 | 438 x 445 x 85.5 | 438 x 600 x 85.5 | 438 x 600 x 85.5 | 438 x 570 x 86.3 | 438 x 570 x 86.3 | 438 x 570 x 86.3 | 438 x 570 x 86.3 | 438 x 570 x 86.3 | 438 x 570 x 86.3 |
| UPS size RACK | 2U | 2U | 2U | 2U | 2U | 2U | 2U | 2U | 2U | 2U |
| UPS weight std (kg) | 15.5 | 15.7 | 25.6 | 26.1 | 13.7 | 13.7 | 15.2 | 15.3 | 15.8 | 15.8 |
| IP rating | IP20 | | | | | | | | | |

EXTERNAL BATTERY MODULE (EBM)


| | | | | | | | | | | |
|-------------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|
| EBM size mm (W x D x H) | 438 x 445 x 85.5 | 438 x 445 x 85.5 | 438 x 600 x 85.5 | 438 x 600 x 85.5 | 438 x 600 x 85.5 | 438 x 600 x 85.5 | 438 x 590 x 129 | 438 x 590 x 129 | 438 x 590 x 129 | 438 x 590 x 129 |
| EBM RACK | 2U | 2U | 2U | 2U | 2U | 2U | 3U | 3U | 3U | 3U |
| EBM weight (kg) | 22.3 Kg | 22.3 Kg | 39.8 Kg | 39.8 Kg | 40.8 Kg | 40.8 Kg | 60 Kg | 60 Kg | 60 Kg | 60 Kg |

KIT MODEL (UPS + EBM)

| | | | | | | | | | | |
|-------------------------|---|---|---|---|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| EBM size mm (W x D x H) | - | - | - | - | 438 x 600 x 171.8 | 438 x 600 x 171.8 | 438 x 590 x 215.3 | 438 x 590 x 215.3 | 438 x 590 x 215.3 | 438 x 590 x 215.3 |
| EBM RACK | - | - | - | - | 2U+2U | 2U+2U | 2U+3U | 2U+3U | 2U+3U | 2U+3U |
| EBM weight (kg) | - | - | - | - | 13.7 + 40.8 | 13.7 + 40.8 | 15.2 + 60 | 15.3 + 60 | 15.8 + 60 | 15.8 + 60 |

(1) Typical: @75% of rated load PF 0.7. (2) Conditions apply.


Connections

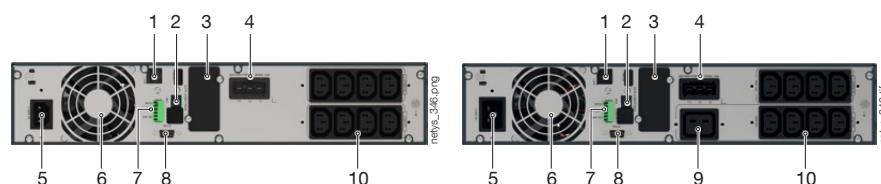


1. RJ50 (for EBM detect /RT MBP detect)
2. USB port
3. Slot for optional communication boards
4. Connector for external battery extension
5. Mains input socket ⁽¹⁾
6. Fan
7. Dry contact interface
8. RS232 interface (MODBUS protocol)
9. Output socket (full power)
10. Output sockets (IEC 320 - 10 A)
11. Parallel slot
12. AC Input /Output port (Terminal Block)

(1) 1-1.5 kVA IEC 320 10 A - 2-3 kVA IEC 320 16 A

1 - 1.5 kVA

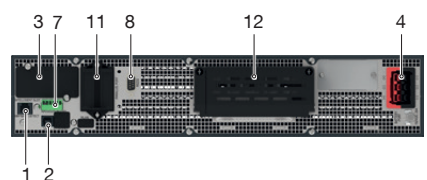


2 - 3 kVA

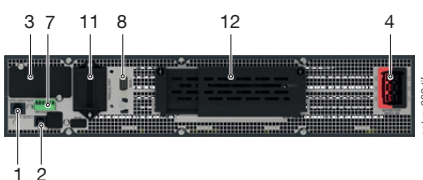

5 - 6 kVA

8.5 - 10 kVA

Control panel

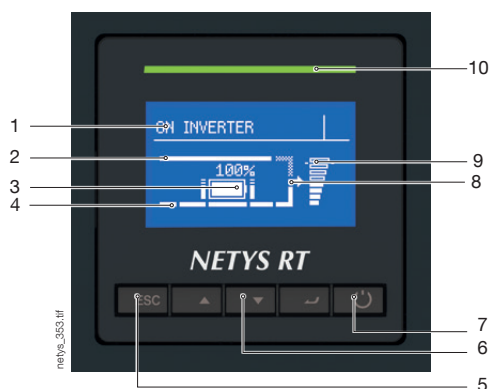

1. UPS status
2. Bypass input
3. Battery status
4. Main input
5. Exit button
6. Navigator button
7. On/off button
8. Output
9. Load status
10. Led bar

NETYS RT - Li-Ion battery UPS



The Li-Ion Battery solution, available for NETYS RT 1-3 kVA, provides higher back-up power density and much longer battery life than traditional lead-acid batteries. The Li-Ion Battery solution is equipped with an embedded interactive BMS (Battery Monitoring System) that provides accurate and individual cell monitoring and coordinates the recharging profile with the UPS to maximise the back-up power availability.

Compact and lightweight

- Lithium-ion batteries weigh much less than their VRLA counterparts, typically being between 40% and 60% lighter. Thanks to their higher energy density and resulting compactness, they are also easier to install - especially in spaced-constrained environments.

Faster to recharge

- Lithium-ion batteries will recharge in just 4 – 5 hours, while VRLA batteries can take over 12 hours. This enables much quicker recovery after discharge, which is crucial in applications requiring continuous uptime.

Higher resiliency

- Lithium-ion batteries allow up to 10 times more charge/discharge cycles compared to VRLA batteries. They also have a wide operating temperature range without sacrificing performance.
- Lithium-ion UPS with tropicalised boards as a standard.

Longer lifespan

- Lithium-ion batteries have a significantly longer lifespan than VRLA batteries - around 2 or 3 times on average. This means fewer or even zero replacements during the lifetime of the UPS and consequently lower maintenance costs.

Up to 5-year warranty

- Lithium-ion battery: 3-year UPS warranty with the option of a 2-year extension. The battery is also covered by the warranty if the UPS is connected to Socomec's cloud.
- In the event of failure, a replacement product will be sent to site within 48 hours (Europe). You will have 1 month to return the faulty product to Socomec.

Technical data

| NETYS RT | | | |
|----------------------------------|--|--|------------------|
| Model | NRT4-Li-U010 | NRT4-Li-U020 | NRT4-Li-U030 |
| Sn | 1000 VA | 2000 VA | 3000 VA |
| Pn | 1000 W | 2000 W | 3000 W |
| Architecture | Online double conversion VFI with input PFC and automatic bypass | | |
| Input socket | 1/1 | | |
| INPUT | | | |
| Voltage | 230 V 1/1 110 V ÷ 300 V; (160 V ÷ 300V @100% load) | | |
| Frequency | 40/70 Hz (50/60 Hz +/-10% Auto-Selectable) | | |
| Power Factor | > 0.99 | | |
| Surge Protection | 296J | | |
| Input socket | IEC 320-C14 (10 A) | IEC 320-C20 (16 A) | |
| OUTPUT | | | |
| Voltage | 230 V (1ph) selectable 200/208/220/230/240 V ±1% (derating 10% @208 V / 20% @200 V) | | |
| Efficiency | Up to 94,6% online mode | | |
| Overload capability | Up to 105% continuously; 125% x 5 min; 150% x 30 sec | | |
| Output connections | 1 main group (4x IEC C13) 1 prog. group (4 x IEC C13) | 1 main group (1x IEC C19 + 4x IEC C13) 1 prog. group (4x IEC C13) | |
| BATTERY | | | |
| Type | Lithium Battery, LiFePO4 | | |
| Standard autonomy ⁽¹⁾ | 36 min | 29 min | 19 min |
| Voltage | 48 VDC | 76.8 VDC | |
| Recharge time | 3.5 hours | 4.5 hours | |
| COMMUNICATION | | | |
| Mimic panel | LCD with menu available in 11 languages | | |
| RS232 MODBUS protocol | • | • | • |
| USB port | • | • | • |
| WEB/SNMP (Ethernet RJ45 port) | Option | Option | Option |
| COMM slot | • | • | • |
| Dry contacts | • | • | • |
| EPO input | • | • | • |
| STANDARDS | | | |
| Safety | IEC/EN 62040-1; AS62040.1; IEC62619:2022; UN38.3 | | |
| EMC | IEC/EN 62040-2; AS 62040.2 | | |
| Performance | IEC/EN 62040-3 (efficiency tested by an external independent body) | | |
| Product declaration | CE, RCM, UKCA, CMIM | | |
| ENVIRONMENT | | | |
| Operating ambient temperature | From 0 °C to +45 °C ⁽²⁾ | | |
| Relative Humidity | 0-95% non-condensing | | |
| Noise level (ISO 3746) | < 45 dBA | < 50 dBA | |
| UPS CABINET | | | |
| UPS size std (W x D x H) | 438 x 445 x 85.5 | 438 x 600 x 85.5 | 438 x 600 x 85.5 |
| UPS size RACK | 2U | 2U | 2U |
| UPS weight std | 15.1 | 21.3 | 21.3 |
| IP rating | IP20 | | |
| EXTERNAL BATTERY MODULE (EBM) | | | |
| EBM size mm (W x D x H) | 438 x 445 x 43 | 438 x 600 x 43 | |
| EBM RACK | 1U | 1U | |
| EBM weight (kg) | 12 Kg | 17.4 Kg | |

(1) Typical: @75% of rated load PF 0.7. (2) Conditions apply.